


User Guide

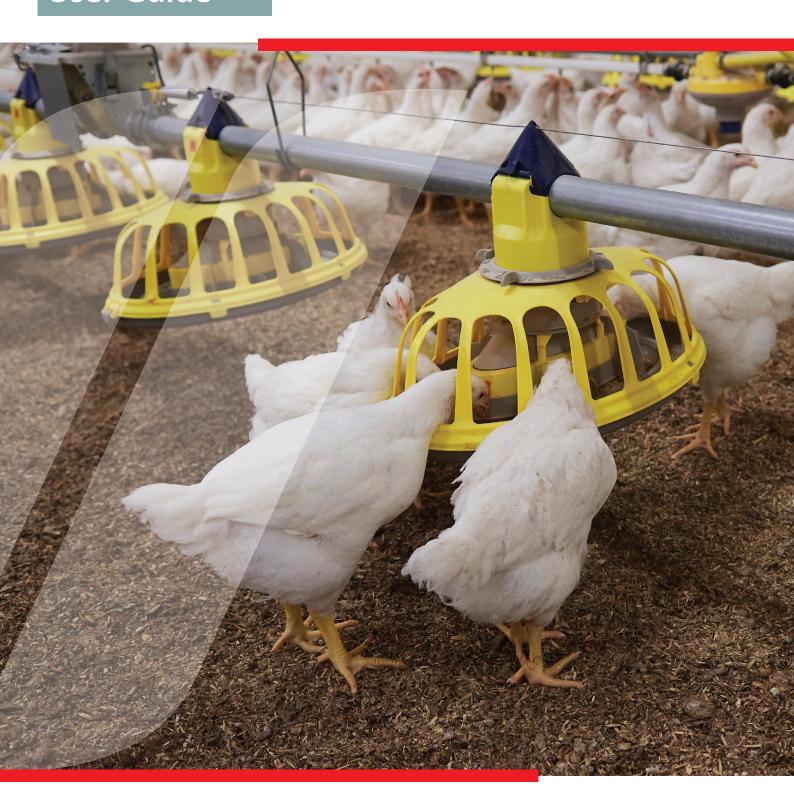

Original User Guide



TABLE OF CONTENTS

DISCLAIMER
GENERAL INFORMATION

GENERAL SAFETY RULES	3
OPERATOR'S GUIDE	4
CLEANING	6
CLEANING AND DESINFECTING (NATURAL BEAK SMOOTHING)	7
MAINTENANCE INSTRUCTIONS	8
TROUBLE SHOOTING GUIDE	9

DECLARATION OF INCORPORATION OF PARTLY COMPLETED MACHINERY EC-DECLARATION OF CONFORMITY

Disclaimer

The original, authoritative version of this manual is the English version produced by ROXELL BV. Subsequent changes to any manual made by any third party have not been reviewed nor authenticated by Roxell. Such changes may include, but are not limited to, translation into languages other than English, and additions to or deletions from the original content. Roxell disclaims responsibility for any and all damages, injuries, warranty claims and/or any other claims associated with such changes, in as much as such changes result in content that is different from the authoritative Roxell-published English version of the manual. For current product installation and operation information, please contact the customer service and/or technical service departments of Roxell. Should you observe any questionable content in any manual, please notify Roxell immediately in writing to: ROXELL BV - Industrielaan 13, 9990 Maldegem - Belgium.

Roxell – – 0821 – General information

General information

! IMPORTANT: These instructions must be read, understood and all points observed by the user, the responsible and operating personnel.

Obey the legal regulations and the applicable rules

This concerns, among other things, the European regulations and directives transposed into national legislation and/or the laws, safety and accident prevention regulations that apply in the user's country.

During assembly, operation and maintenance of the installation the legal regulations concerned and the applicable technical rules must be obeyed.

Intended use

The installation has been designed solely for intensive livestock use and has been developed according to the applicable rules of good workmanship. Extra loading of the product is therefore prohibited. Any other use is considered to be improper use. The manufacturer is not responsible for damage resulting therefrom. The user bears sole responsibility. The manufacturer can determine from the system data whether the product was used in accordance with the specified use.

Not-intended use

All use different than described in Intended Use is at the responsibility of the end user.

Liability

The (extended) warranty will not apply if any of the following has occurred: failure by the customer to inspect the delivered goods and report visible defects within 8 days of delivery with respect to the products, improper handling, transportation, modification or repair; accidents, defective or improper use; improper or defective assembly, installation, connection or maintenance (having regard to Roxell's most current assembly, installation, connection and maintenance manuals); improper modifications or manipulations of the operating system, hardware or any other software of the product by the customer; force majeure; negligence, lack of supervision or of maintenance on the part of customer; normal wear and tear; use of cleansing agents and disinfectants that are excluded in Roxell's most current use and maintenance manuals; use of cleansing agents and disinfectants in violation with the instructions received from the suppliers; or use of the products in an ATEX- surrounding.

The (extended) warranty shall not apply in the event of a defect caused either by materials or accessories supplied by or services rendered by the customer; or by an intervention by a person or entity which is not authorized or qualified for carrying out such intervention. Furthermore, the (extended) warranty will only apply if the products are used in livestock houses and if all parts or components of the products are supplied by Roxell.

Roxell will not be liable for any damages caused due to improper or defective use, assembly, installation, connection or maintenance of the products. In this respect, the customer expressly acknowledges that (i) all use, assembly, installation, connection or maintenance must be done in accordance with Roxell's most current assembly, installation, connection and maintenance manuals and (ii) the electrical installation on which the products must be connected must be done in accordance with applicable local legislation on electrical installations. Furthermore, the products must be tested both mechanically and electrically by the customer in accordance with state of the art techniques and applicable local legislation.

Personnel qualifications

User

The person who uses a function or operation of a product for their work or who works on the product. The user must be able to read the instructions for use and fully understand them. The user has knowledge of the functioning and construction of the installation.

− General information Roxell − − 0821

Technically trained person

An expert who can assemble and maintain the installation (mechanically/electrically), and resolve malfunctions. On the basis of his/her technical training and experience, he/she has sufficient knowledge to be able to assess activities, recognize possible dangers and rectify dangerous situations.

Storage

Put all parts to be assembled in a room or at a location where the not yet assembled components are protected against weather influences.

Transport

Depending on the size of the parts and according to local circumstances and local legislation, the parts of the machine have to be transported with a forklift.

The forklift must be operated by a qualified person and in accordance with the rules of good workmanship. When lifting the load, always check if the center of gravity of the load is stable.

Dismantling

Dismantle the installation and its components in accordance with the environmental legislation of the country or the local authorities applicable at that time. All functioning products and exchange parts must be stored and disposed of in accordance with the applicable environmental regulations.

Environmental information for customers in the European Union



The European legislation requires that equipment marked with this symbol on the product or packaging must not be collected with unsorted household waste.

This symbol indicates that the waste electrical and electronic equipment (WEEE) cannot be disposed of in the regular household waste. We highly recommend that you bring your product to an official collection point so that an expert can remove the waste electrical and electronic equipment. Inform yourself of local legislation on separate collection of waste electrical and electronic equipment. Respect the local regulations and never dispose of the product together with household waste.

Information about waste disposal - electrical/electronic material for companies

1. In the European Union

If you have used the product for commercial purposes and you want to dispose of it, contact Roxell, who will give you information about the return of the product. It is possible that you will have to pay a disposal charge for the return and recycling. Small products (and small quantities) can be processed by the local collection agencies.

2. In other countries outside the European Union

If you want to dispose of this product, contact the local authorities for information concerning the correct disposal procedure.

The level of noise emission

The noise level of the installation in operation does not exceed 70 dB(A).

Roxell – – 0821 – General information

LOTOTO = Lock Out - Tag Out - Try Out

Before you begin: Everyone needs his own lock and tag (label), which can't be removed by other persons. Inform all the persons who are influenced by the procedure.

- 1 To block
 - Localize all sources of energy (electric, hydraulic, pneumatic).
 - Switch off.
 - Take the relevant installation or process out of operation and lock it against reuse. You can do this by placing a padlock or other blocking mechanism (Lock Out).
- 2 To mark

Attach a sign, label or sticker to the padlock or blocking mechanism to reveal the nature and the expected duration of the work to other persons (Tag Out).

- 3 To check
 - Check if the source of energy is switched off.
 - Remove any remaining energy.
 - Check that the installation or process is actually safe (Try Out).

Use personal protective equipment

Ensure you wear personal protective equipment (gloves, dust masks...).

Illuminance - sufficient lighting

- A minimum illuminance of 200 lux is necessary during usage, maintenance and installation.
- Provide at the installation (portable) emergency lighting in case of power failure.

Electrical equipment, control panels, components and drive units

- To operate control panels, there must be at least 70 cm of free space.
- Control panels must always remain closed. The key of the control panel must be in possession of an authorized person. Only an electrically trained person (see above) shall carry out maintenance activities inside the control panels.
- The necessary measures must be taken by the user to keep out rats, mice and other vermin from the control panels.
- If electrical equipment, control panels, components and drive units are damaged, the system must be stopped immediately!
- Electrical equipment, control panels, components and drive units should never be sprayed with water or other liquid!
- Electrical equipment, control panels, components and drive units should never be covered with any material.

− General information Roxell − − 0821

Information about the residual risks - used safety signs

There are three levels of danger, which you can recognize from the following signal words:

- DANGER
- WARNING
- CAUTION

The nature and source of the imminent danger and possible consequences of not obeying warnings is stated here!

Symbol	Meaning
<u>^</u>	DANGER indicates a direct imminent danger that can result in a serious or even fatal accident if the safety measures are not respected.
<u>^</u>	WARNING indicates a possible imminent danger that can result in a serious accident or damage to the product if the safety measures are not respected.
<u>^</u>	CAUTION indicates possible, dangerous situations that can result in minor physical injury or material damage if the safety measures are not respected.
i	This symbol refers to supporting information.
\checkmark	Allowed
X	Not allowed
	This symbol will be used to draw your attention to matters that are of great importance for your safety. It means: warning - follow the safety instructions. Disconnect the current and read the safety rules. In short: be alert. Ignoring these instructions can cause serious injuries or even death.

ROXELL - 2517 VITOO - EU

GENERAL SAFETY RULES

KiXoo/Vitoo/Boozzter Nr: 008.../008.../002...

Automatisch pannen voedersysteem voor opfok en productie van slachtkuikenouderdieren.

Automatic pan feeding system for rearing and production of broiler breeders.

Winching systeem

Liersysteem voor voer- en drinklijnen Winching system for feed and drink lines



IMPORTANT

Carefully read the following instructions before **USING** the system

- 1. Before you do any repair, or maintenance works, always disconnect the electricity supply.
- 2. Ensure you wear personal protection equipment (gloves, dust masks).
- 3. The system starts automatically.

 Never use your hands at dangerous locations (feed intake boots, drive units, control units or outlet holes in the tubes) before you have completely switched off the transport system and made sure that nobody can switch it on without your knowledge.
- **4. Never** allow **unauthorized persons** to **enter the house** in your absence.
- 5. Be careful when lowering or winching up the feeding lines/circuits:
 - **stop** immediately at the slightest hitch.
 - **never** stay **underneath** when lowering or winching up the lines/circuit.
- **6.** If the auger stalls: **immediately** switch **off** the system. Carefully read the trouble shooting guide and strictly follow instructions. Contact a **technically trained person**. An auger **under tension** can **cause very serious injuries** when released.
- 7. Regularly check the elbow/trough and/or tube connections. Tighten if necessary.
- **8.** Regularly check that the **control unit (pan)** and/or the **motor handy box** are properly closed.
- **9.** Ensure that the **hopper cover grill or cover** on the 100 kg hopper **closes properly**.
- 10. The standard winching system is only suitable for height regulation during the flock's stay and winching up for cleaning (1x per flock). For more frequent winching, use the daily winching components.



This **SYMBOL** will be used to draw your attention to matters that are of **GREAT IMPORTANCE** for your **SAFETY**.

It means: WARNING - follow the safety instructions:

disconnect the current - re-read the safety rules.

In short: **BE ALERT**. IGNORING these instructions can cause SERIOUS INJURIES or even DEATH.

OPERATOR'S GUIDE



CONTROL PANEL SETTINGS

REARING PERIOD "AD LIBITUM"

Feed windows open

Control pan selection switch



Regularly fill all pans manually (M)



Stop the circuits as soon as all pans have been filled !!!

Feed windows closed


Control pan selection switch






Set the counter at 999999

All switches (A)





- * Spread the litter evenly over the house floor.
- * Set the inside grill in its LOW position. Make sure that all grills are completely opened (pos 50).
- * Lower all pans into the litter.
- * Make sure that **ALL** feed windows are completely opened.
- * Fill all pans manually (M). Repeat this daily 2-3 times, so that there is always fresh feed in the pan.
- * Winch up the lines after 10-14 days (pans about 1cm above litter) to close the feed windows.
- * All switches in position automatic (A).
- * When necessary, winch up the pans gradually into a higher position.
- * You can create a DEEP pan (that prevents feed wastage) by setting the inside grill in position 80. Make sure that the 4 clickfingers close well. The grill opening remains 50.

REARING PERIOD "RESTRICTION"

Feeding every day

"Skip a day"


Control pan selection switch


Control pan selection switch





Set the starting time. Set activation time longer than the time to finish the meal.





Set the counter at the required feed amount.

"1"= 10kg (6,5 ton weigher)

"1"= 25kg (13 ton weigher)

Reset the counter every day (if necessary adjust) after the clock became inactive.

LAYING PERIOD

* Change the grill opening (clockwise) according the age of the animals. Height grill opening: 80 or 70. Width: 40-50.

Control pan selection switch





po	sition	feeding time
	I	> 30 min.
	II	< 30 min.

Position I: the control pan switches on and off the circuits automatically until the daily feed ration has been distributed.

Position II: the control pan is "by-passed" and the circuits run continuously until the daily feed ration has been distributed.

VITOO -

USER'S

GUIDE

Ē

00800854

3919 VitooTM

HOUSE CHART




Age (weeks)	Feeding regime	Position of the control pan selection	Position of the feed level ring = streamopening beneath cone	Poultry perch system	Suspension height of the pan
1	Ad libitum		14	off	into the litter: feed windows open
2				off	1 cm above the litter : feed windows closed
3				on	1CM
5 6	Mild restriction		meal 3 - 8	off	Back of the birds = edge of eating opening
7			pellets/crumbles	on	
18	Severe restriction		3 - 6	off	
19 20			Do not use the feed level ring above position 8 while rearing breeders.	on	X.
21			rearing process.	off	


CLEANING

- * The last day : run the tubes empty and let the birds empty the pans as much as possible.
- * Winch up the lines to a working height of about 1m for easy cleaning.
- * Collect the feed residues by opening all pans, and empty them.
- * Protect electrical components against water.
- * Clean the whole system by means of a high-pressure cleaner (max 100 BAR).
- * When using aggressive detergents or disinfectants consult your supplier.



Before cleaning, release the bottom pan and turn it downwards. Ensure that the feeder pan can fully drip off and dry after cleaning to prevent corrosion of the metal insert.





CLEANING AND DESINFECTING (NATURAL BEAK SMOOTHING)

- Do not use any products that can lead to corrosion of galvanized steel.
- Always follow the prescriptions of the manufacturer of the cleaning and disinfecting agent closely. Use the prescribed concentration and contact time.
- Rinse carefully with pure water to remove all residues after cleaning and disinfecting.
- Rinse carefully between using different cleaning and disinfecting products.
- Remove all residual water from the feeding pans by letting the pans drip out after cleaning and disinfecting and dry out before closing.
- Remove all residues after drying.
- Cleaning advice:
 Clean using a mild alkaline agent (pH 8-10) e.g. pro-Rein (Cidlines) or
 other according to the specifications of the manufacturer (concentration and contact
 time).
- Disinfecting advice:
 Disinfect using an agent based on glutaraldehyde and quaternary ammonium compounds e.g. Virocid (Cidlines) or other according to the specifications of the manufacturer (concentration and contact time).



CAUTION

Before cleaning, release the bottom pan and turn it downwards. Ensure that the feeder pan can fully drip off and dry after cleaning to prevent corrosion of the metal insert.

ROXELL - 0722

MAINTENANCE INSTRUCTIONS				
Switch off the main switch first. Use personal protective equipment. DANGER	3-monthly	6-monthly	Yearly	
ACTIONS IN GREY BACKGROUND MUST BE DONE BY A TECHNICALLY TRA	AINED PE	RSON.		
1. Power unit				
- Make fan dust-free		X		
- Check possible damages to electrical wiring			Х	
2. Drive unit (circuits)				
- Make fan dust-free		Х		
- Check possible damages to electrical wiring			Х	
- Clean gear housing			Х	
3. 100kg hopper (lines)				
- Check level switch			Х	
4. Suspension				
- Check operation of (central) winch	Х			
- Check operation of (central) winch. Grease after cleaning.		Х		
- Check connection of cable	Х			
- Check connection of pulleys	Х			
- Check suspension of tubes and motors	Х			
- Keep suspension cord/cable in tension	Х			
5. Poultry perch cable above the tubes/elbows				
- Check cable			Х	
6. Pans				
- Check possible damages of pans			Х	
7. Sensors/switches				
- Check operation of safety switch or sensor.		X		
- Check electrical wiring			Х	
8. Control pan				
- Remove the pan and clean the inside tube			Х	
- Clean (dry) sensor head and central tube			Х	
- Check switch of control units			Х	
9. Feed intake boot				
- Clean			Х	
- Check possible wear of plastic gear			Х	
10.Lines/circuits				
 Check screws and bolts in the system after the first month and after each batch. Tighten if necessary. 	Х			
- Keep tubes level.	Х			
Remove all feed from the system when the system will be out of use for a period.	Х			

TROUBLE SHOOTING GUIDE



Switch off the main switch first. Use personal protective equipment.

ACTIONS IN GREY BACKGROUND MUST BE DONE BY A TECHNICALLY TRAINED PERSON.

FOR ANY AUTOMATIC OPERATION, NONE OF THE YELLOW LAMPS SHOULD BURN!

PROBLEM	YELLOW LAMP	CAUSE	CORRECTIVE ACTION
None of the feeder lines run.	NO	No current.	Check main switch and/or fuses and/or line current.
2. FA bin to weigher	NO	a. Operation button not on "ON" position.	Adjust button.
does not run	NO	b. Max. switch of weigher remains activated.	Check Max. switch and repair or replace it if necessary.
		c. FA safety switch is activated.	Disengage safety switch and find cause of blockage.
	YES	d. Thermal-magnetic switch-off of the FA.	Check fuses. Check adjustment of motor protection. Reload motor protection and check its proper operation.
3. FA weigher	NO	a. See 2.a.	
to circuits does not run.		b. Sensor remains activated. See signal lamp sensor.	Check and repair.
	NO	c. See 2.b. and 2.c.	
	YES	d. See 2.d.	
4. FA weigher	NO	a. Sensor not properly installed.	Check.
to circuits short cycles		b. Timer of sensor adjusted too low.	Adjust timer on a higher value.
5. The circuit does not	NO	Wrong programming of time clock or counter or no programming at all.	Check programming.
run.	YES YES	Left or right hand motor of one or more circuits switched-off without being overloaded.	Check fuses. Check adjustment of motor protection. Reload motor protection and check its proper operation.
		b. Left or right hand motor of one or more circuits switched-off thermal- magnetically (overloaded).	
		Too much feed in the tubes.	Have pans emptied by the birds. Check the operation of the sensor in the control pan.
		Connector intake boot/tube or tube-elbow not properly tightened.	Tighten connector correctly.
		3. Auger coupling not properly installed.	Check auger couplings and replace if necessary.

PROBLEM	YELLOW LAMP	CAUSE	CORRECTIVE ACTION
		4. Auger kinked .	Replace damaged auger.
		5. Wheel inside intake boot is blocked.	Disengage wheel or replace if necessary.
		6. Obstruction in the tube.	Find blocking spot and remove the obstruction. SEE NOTE*.
		7. Feed in front of the sensor in the control pan.	Check if the control pan is empty.
		8. Too much dust on the sensor in the control pan.	Unmount the control pan and clean the sensor.



NOTE: IF THE AUGER OF THE CIRCUIT IS BLOCKED AS A RESULT OF ONE OF THE ABOVE PROBLEMS, IT WILL BE UNDER SPRING TENSION, SO BE EXTREMELY CAREFUL AND PROCEED AS DESCRIBED BELOW THIS PAGE*

6. The circuit: - stops pre- maturely does not stop in time.		a. Time set on time clock is not sufficient.	Adjust time clock programming.
		b. The sensor in the control pan is defective or not properly adjusted.	Check the sensor operation and replace if necessary
7. Auger runs erratically.		a. When using the system for the first time.	This is not a breakdown; it will be ok after a couple of days.
		b. Auger too short.	Adjust auger length.
		c. Auger kinked as a result of careless installation.	Replace kinked parts.
		d. Auger coupling not properly installed.	See installation instructions. Replace coupling if necessary.
		e. Circuit too long.	Check maximum length and install an extra power unit if necessary.
		f. Circuit not properly suspended (loose or ineffective suspension).	Realign circuit. Check all suspensions and readjust where needed.



SWITCH OFF THE MAIN SWITCH OF THE CENTRAL CONTROL PANEL BEFORE YOU PROCEED WITH MANUAL CHECKS OR REPAIRS OF AUGERS OR POWER UNITS!

* WHEN THE AUGER IS BLOCKED, PROCEED AS FOLLOWS:

- 1. Put the main switch in position "Off".
- 2. Locate the blocking spot precisely.
- 3. Reload the motor protection (left or right).
- 4. Find the cause and correct. (See page 8: 3., 4., 5. or 6.).
- **5.** Put main switch in position "ON". The circuit is ready for a new feeding cycle.



Inbouwverklaring betreffende niet voltooide machines (Richtlijn 2006/42/EG, Bijlage II.1.B)

Declaration of incorporation of partly completed machinery (Directive 2006/42/EC, Annex II.1.B)

Fabrikant/Manufacturer:

Roxell BV, Industrielaan 13, 9990 Maldegem

Tel: +32 50 72 91 72 Fax: +32 50 71 67 21

Verklaart geheel onder eigen verantwoordelijkheid dat het product: Declares on its own responsibility that the product:

KiXoo/Vitoo/Boozzter Nr: 008.../008.../002...

Automatisch pannen voedersysteem voor opfok en productie van vleeskuikenouderdieren. Automatic pan feeding system for rearing and production of broiler breeders.

Waarop deze verklaring betrekking heeft, in overeenstemming is met:

- de volgende richtlijnen: 2006/42/EG (Machinerichtlijn); 2014/30/EU (Elektromagnetische Compatibiliteit);
- de geharmoniseerde Europese Normen: EN ISO 12100:2010; EN ISO 13854:2019;
 EN ISO 13857:2019; EN IEC 60204-1:2018; EN IEC 61439-1:2021; EN IEC 61439-2:2021.

Het is verboden bovengenoemd product in gebruik te stellen voordat de machine waarin het wordt ingebouwd in overeenstemming met de bepalingen van de Machinerichtlijn is verklaard.

Tevens verbindt de fabrikant (of zijn gemachtigde) zich om op met redenen omkleed verzoek van de nationale autoriteiten de relevante informatie over deze niet voltooide machine door te geven. De wijze van doorgifte is digitaal. De wijze van informatieverschaffing laat de intellectueeleigendomsrechten van de fabrikant van de niet voltooide machine onverlet.

(NL)

Relating to this declaration is in accordance with

- The following directives 2006/42/EC (Machinery Directive); 2014/30/EU (Electromagnetic Compatibility).
- The harmonised European standards: EN ISO 12100:2010; EN ISO 13854:2019;
 EN ISO 13857:2019; EN IEC 60204-1:2018; EN IEC 61439-1:2021; EN IEC 61439-2:2021.

This product must not be put into service until the machinery into which it is to be incorporated has been declared in conformity with the provisions of the Machinery Directive.

The manufacturer (or its agent) also undertakes, at the duly reasoned request of the national authorities, to provide the relevant information concerning this partly completed machinery. The method of transmission will be digital. The manner in which the information is provided does not prejudice the manufacturer's intellectual property rights concerning the partly completed machinery. **(EN)**

Plaats, Datum / Place, Date: Maldegem, 01/01/2023 Dhr. Gino Van Landuyt **Managing Director** "This part may only be filled out if all built-in subparts are delivered by Roxell" EG-verklaring van overeenstemming (Richtlijn 2006/42/EG, Bijlage I.1.A) EC-declaration of conformity (Directive 2006/42/EC, Annex II.1.A) Wij/We_ (naam installateur/name fitter) (volledig adres en land/complete address) Verklaren geheel onder eigen verantwoording de Declare completely on own justification that (naam machine/name machinery) (nummer CE-label/number CE-label) In een installatie te hebben ingebouwd geheel volgens de Roxell-voorschriften en in overeenstemming met de bepalingen van de Machinerichtlijn. Has been incorporated in conformity with the provisions of the Machinery Directive and the prescriptions of Roxell BV.

De EG-verklaring van overeenstemming / inbouwverklaring betreft uitsluitend de machine of niet voltooide machine in de toestand waarin zij op de markt is gebracht, met uitsluiting van de later bijvoorbeeld door de verdeler en/of installateur en/of eindgebruiker toegevoegde componenten en/of verrichte bewerkingen.

(naam, handtekening/name, signature)

(plaats, datum/place, date)

The EC-declaration of conformity / declaration of incorporation relates exclusively to the machinery or partly completed machine in the state in which it was placed on the market and excludes components which are added and/or operations carried out thereafter for instance by the distributor and/or the installer and/or the final user.



UK Declaration of Incorporation of partly completed machinery

Supply of Machinery (Safety) Regulations 2008

Manufacturer:

Roxell BV, Industrielaan 13, 9990 Maldegem

Tel: +32 50 72 91 72 Fax: +32 50 71 67 21

Declares on its own responsibility that the product:

KiXoo/Vitoo/Boozzter Nr: 008.../008.../002...

Automatic pan feeding system for rearing and production of broiler breeders.

Relating to this declaration is in accordance with the essential requirements of

- The following Statutory Instruments:
 - Supply of Machinery (Safety) Regulations 2008
 - o Electromagnetic Compatibility Regulations 2016
- The following Designated standards:

BS EN ISO 12100:2010; BS EN ISO 13854:2019; BS EN ISO 13857:2019; BS EN IEC 60204-1:2018; BS EN IEC 61439-1:2021; BS EN IEC 61439-2:2021.

This product must not be put into service until the machinery into which it is to be incorporated has been declared in conformity with the provisions of the Machinery Directive.

The manufacturer (or its agent) also undertakes, at the duly reasoned request of the national authorities, to provide the relevant information concerning this partly completed machinery. The method of transmission will be digital. The manner in which the information is provided does not prejudice the manufacturer's intellectual property rights concerning the partly completed machinery.

Place, Date: Maldegem, 01/01/2023

Dhr. Gino Van Landuyt Managing Director "This part may only be filled out if all built-in subparts are delivered by Roxell"

UK Declaration of Conformity

Supply of Machinery (Safety) Regulations 2008

We_			
	(name installer)		
		-	
	(complete address)		
Decla	are completely on own jus	itification that	
	(name machinery)	(number UKCA-marking)	
	peen incorporated in confo and the prescriptions of F	ormity with the provisions Supply of Machinery (Safety) Regul Roxell BV.	ations
	(place, date)	(name, signature)	

The UK Declaration of Conformity / Declaration of Incorporation relates exclusively to the machinery or partly completed machine in the state in which it was placed on the market and excludes components which are added and/or operations carried out thereafter for instance by the distributor and/or the installer and/or the end user.



EG-verklaring van overeenstemming (Richtlijn 2006/42/EG, Bijlage II.1.A) **EC-declaration of conformity** (Directive 2006/42/EC, Annex II.1.A)

Fabrikant/Manufacturer:

Roxell BV, Industrielaan 13, 9990 Maldegem

Tel: +32 50 72 91 72 Fax: +32 50 71 67 21

Verklaart geheel onder eigen verantwoordelijkheid dat het product: Declares on its own responsibility that the product:

Winching system Nr: 00102368 / 00102087
Liersysteem voor voer- en drinklijnen; manueel en gemotoriseerd
Winching system for feed- and drink lines; manual and motorised
Nummer CE-label/number CE-label :

Waarop deze verklaring betrekking heeft, in overeenstemming is met:

- de volgende richtlijnen: 2006/42/EG (Machinerichtlijn); 2014/30/EU (Elektromagnetische Compatibiliteit);
- de geharmoniseerde Europese Normen: EN ISO 12100:2010; EN ISO 13854:2019; EN ISO 13857:2019; gemotoriseerd: EN IEC 60204-1:2018; EN IEC 61439-1:2021; EN IEC 61439-2:2021.

De EG-verklaring van overeenstemming / inbouwverklaring betreft uitsluitend de machine of niet voltooide machine in de toestand waarin zij op de markt is gebracht, met uitsluiting van de later door bijvoorbeeld de verdeler en/of installateur en/of eindgebruiker toegevoegde componenten en/of verrichte bewerkingen.

(NL)

Relating to this declaration is in accordance with

- The following directives 2006/42/EC (Machinery Directive); 2014/30/EU (Electromagnetic Compatibility).
- The harmonised European standards: EN ISO 12100:2010; EN ISO 13854:2019; EN ISO 13857:2019; motorised: EN IEC 60204-1:2018; EN IEC 61439-1:2021; EN IEC 61439-2:2021.

The EC-declaration of conformity / declaration of incorporation relates exclusively to the machinery or partly completed machine in the state in which it was placed on the market and excludes components which are added and/or operations carried out thereafter for instance by the distributor and/or the installer and/or the final user.

(EN)

Plaats, Datum / Place, Date: Maldegem, 01/01/2023

Dhr. Gino Van Landuyt Managing Director



UK Declaration of Conformity

Supply of Machinery (Safety) Regulations 2008

Manufacturer:

Roxell BV, Industrielaan 13, 9990 Maldegem

Tel: +32 50 72 91 72 Fax: +32 50 71 67 21

Declares on its own responsibility that the product:

Winching system Nr: 00102368 / 00102087

Winching system for feed- and drink lines; manual and motorised

Number UKCA-marking:

Relating to this declaration is in accordance with the essential requirements of

- The following Statutory Instruments:
 - o Supply of Machinery (Safety) Regulations 2008
 - o Electromagnetic Compatibility Regulations 2016
- The following Designated standards:


BS EN ISO 12100:2010; BS EN ISO 13854:2019; BS EN ISO 13857:2019; BS EN IEC 60204-1:2018; BS EN IEC 61439-1:2021; BS EN IEC 61439-2:2021.

The UK Declaration of Conformity / Declaration of Incorporation relates exclusively to the machinery or partly completed machine in the state in which it was placed on the market and excludes components which are added and/or operations carried out thereafter for instance by the distributor and/or the installer and/or the end user.

Place, Date: Maldegem, 01/01/2023

Dhr. Gino Van Landuyt

Managing Director

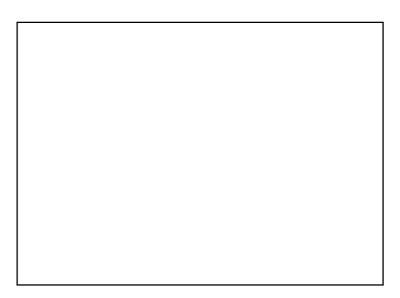



ROXELL BV - Industrielaan 13, 9990 Maldegem (Belgium) Tel. +32 50 72 91 72 - info@roxell.com - www.roxell.com

ROXELL USA Inc. - 720 Industrial Park Road, Anderson MO 64831 (USA) Tel. +1 417 845 6065 - info.usa@roxell.com - www.roxell.com

ROXELL Malaysia - No. 49, Jalan Permata 2/KS9, Taman Perindustrian Air Hitam, 41200 Klang, Selangor (Malaysia) Tel. +60 3 3123 1767 - info.malaysia@roxell.com - www.roxell.com

ROXELL Россия - OOO «Рокселл» ОГРН 1157746055026 123060, Россия, город Москва, улица Маршала Рыбалко, дом 2, корпус 9, офис 909.1 Телефон: +7 495 983 30 15 - Адрес электронной почты: info.russia@roxell.com - www.roxell.com